



玉柴重工

YUCHAI HEAVY INDUSTRY

— Since 1989



YC25-8




Machine weight : 3080 \ 2820 kg

Bucket capacity : 0.07 m³

Engine power : 24/2200 kW/rpm



- Structural Reliability
- Excellent Performance
- High Efficiency

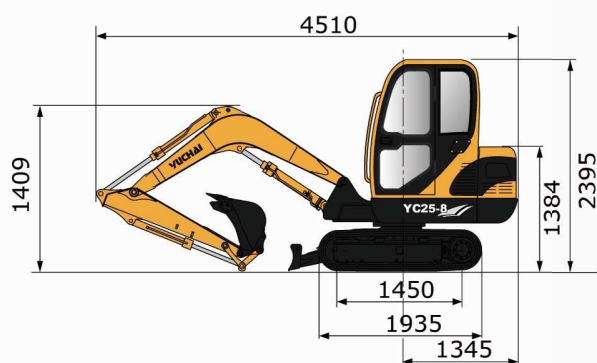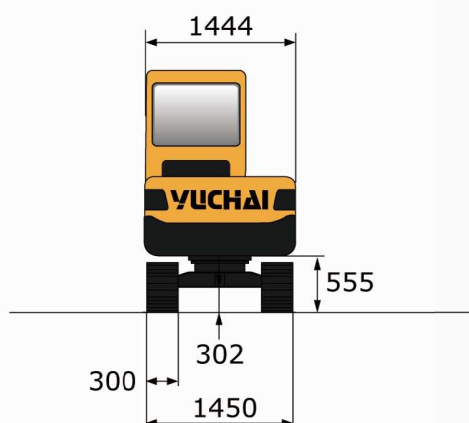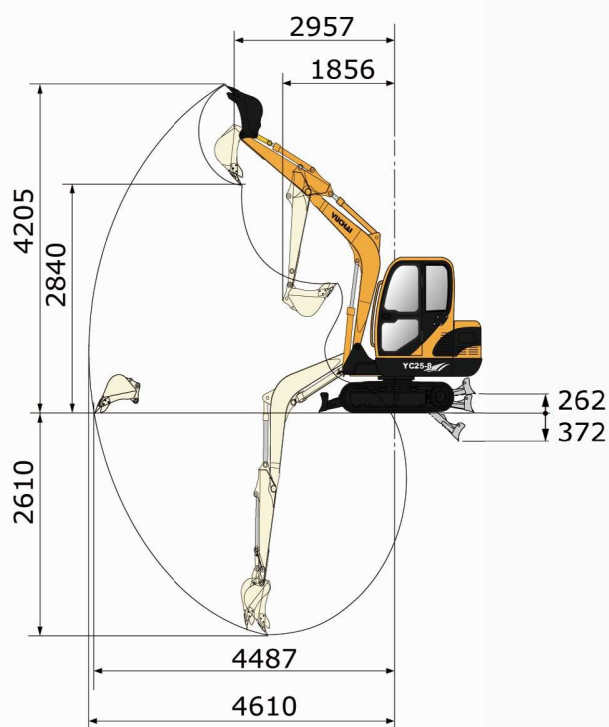

Technical Specification

Basic parameter

Machine weight Cabin \ Canopy	3080 \ 2820 kg
Bucket capacity	0.07 m ³
Width of bucket	517 mm

Performance parameter

Engine model	KUBOTA D1803
Engine power	24/2200 kW/rpm
Gradeability	30 °
Max. digging force of arm	18 kN
Max. digging force of bucket	14 kN
Traveling speed	2.4/4.2 km/h
Max. hauling force	28.2 kN
Slewing speed of platform	11 rpm

Operating parameter

Max. digging height	4205 mm
Max. digging depth	2610 mm
Max. digging radius	4610 mm
Max. digging radius on ground level	4487 mm
Max. dumping height	2840 mm
Min. slewing radius	1856 mm
Max. vertical digging depth	2957 mm

Transportation dimension

Overall length of transportation	4510 mm
Overall width	1450 mm
Overall height Cabin \ Canopy	2395 \ 2465 mm

Other Parameter

Width of undercarriage	1450 mm
Length of track	1935 mm
Width of track (Rubber crawler)	300 mm
Min ground clearance	302 mm
Height between platform and ground	555 mm
Platform tail turning radius	1345 mm
Wheel base	1454 mm
Fuel tank capacity	33 L
Hydraulic oil tank capacity	38 L